
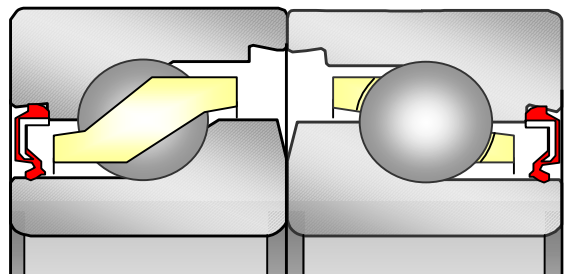


Sealed Ball Screw Support Bearings

NACHI

TAB-2LR Series

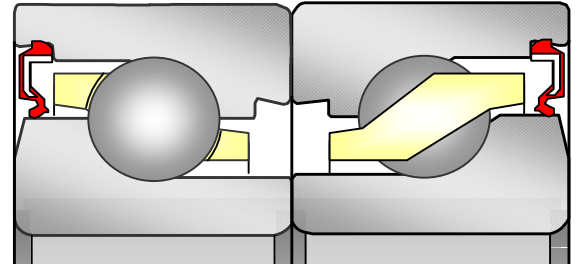

- Heavy-duty LR Seal
- High-performance Grease
- Compatible Dimensions with Standard Bearing

Sealed for Life - Support Bearing

Sealed for Life

Sealing keeps the contamination out and prevents the leakage of the prepacked high performance grease.

Therefore allows you to have
a maintenance free and long life bearing.

Cost & Energy Savings

Minimizes power loss due to low and stable starting and running torque.



Pre-set Preload

Pre-set preloading conditions provides for *ease of assembly* by eliminating complex assembly adjustment.

Low Noise & Long Life

Reduced noise design due to polyamide cage and high-performance grease ensures *smooth quiet operation and long bearing life.*


Technical Information

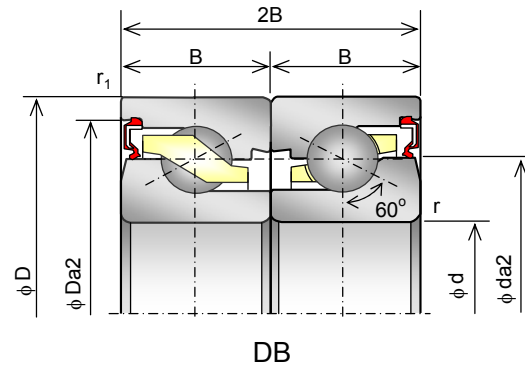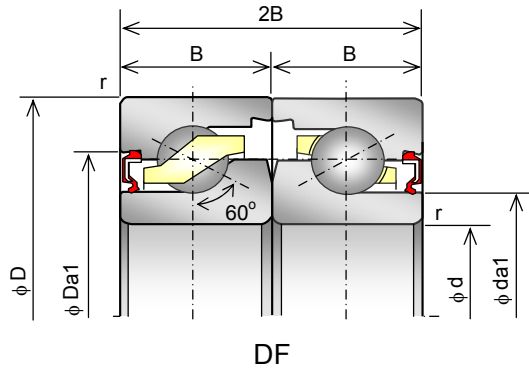

Bearing No.	Boundary Dimensions (mm)					Basic Dynamic Load Rating Ca (N)	Static Axial Load Limmit (N)	Limiting Speed (min ⁻¹)	Reference Dimensions				
	d	D	B	r _{min}	r _{1 min}				da1	da2	Da1	Da2	
20TAB04DF-2LR	20TAB04DB-2LR	20	47	15	1	0.6	25,900	30,500	4,400	26.8	33.7	35.0	41.9
25TAB06DF-2LR	25TAB06DB-2LR	25	62	15	1	0.6	29,900	43,000	3,250	39.7	46.2	47.5	54.9
30TAB06DF-2LR	30TAB06DB-2LR	30	62	15	1	0.6	29,900	43,000	3,250	39.7	46.2	47.5	54.9
35TAB07DF-2LR	35TAB07DB-2LR	35	72	15	1	0.6	32,500	52,000	2,600	49.7	56.2	57.5	64.9
40TAB07DF-2LR	40TAB07DB-2LR	40	72	15	1	0.6	32,500	52,000	2,600	49.7	56.2	57.5	64.9
40TAB09DF-2LR	40TAB09DB-2LR	40	90	20	1	0.6	65,000	96,500	2,200	57.2	67.2	68.5	79.9

Standard Preload

Bearing No.	Preload (GM) (N)
20TAB04DF-2LR 20TAB04DB-2LR	2,160
25TAB06DF-2LR 25TAB06DB-2LR	3,330
30TAB06DF-2LR 30TAB06DB-2LR	3,330
35TAB07DF-2LR 35TAB07DB-2LR	3,920
40TAB07DF-2LR 40TAB07DB-2LR	3,920
40TAB09DF-2LR 40TAB09DB-2LR	6,200

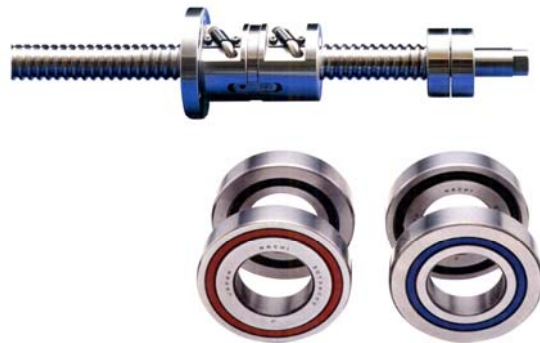

Office

NACHI

NACHI MEXICANA SA DE CV
 Tequisquiapan 2, Aerotech Industrial Park
 Colón, Querétaro, México CP 76295

www.nachi.com.mx

NMX-IV-2020-05